

PFA 430

Everflon™ Fluoropolymers
Extrusion&Injection Pellets

DESCRIPTION

Applications for Everflon™ PFA 430 include high performance thinwall wire coatings; intricate injection molded parts for production of chemicals and electronic parts; and fluid handling systems for high performance chemical filters. With a typical melt flow rate (MFR) of 40, Everflon™ PFA 430 resin is ideally suited for applications requiring a high processing speed and very low viscosity.

Everflon™ PFA 430 is a special purpose fluoroplastic resin available in pellet form. This resin has a higher melt flow rate (typical MFR of 40) than most other PFA fluoroplastic resins, which permits higher extrusion speed and easier processing, making Everflon™ PFA 430 a costeffective alternative for producing thin-wall and complicated articles.

Unlike other high melt flow rate polymers, Everflon™ PFA 430 is specially formulated to provide a high melt flow rate for processing ease, while still providing good flexural properties and stress-crack resistance. These unique properties, coupled with the resin's high thermal stability, enable thin coatings of ultra-fine wires and injection molding of complex parts.

Everflon™ PFA 430 combines the processing ease of conventional thermoplastics with many properties

similar to those of polytetrafluoroethylene. Compared to other thermoplastics, the high melt strength and thermal stability of Everflon™ PFA 430 can be used to improve processing rates, and allows intricate electronics to be insulated with an extremely thin coating and still withstand soldering. Properly processed products made from neat Everflon™ PFA 430 resin provide the superior properties typical of the fluoroplastic resins: chemical inertness, exceptional dielectric properties, heat resistance, toughness and flexibility, low coefficient of friction, non-stick characteristics, negligible moisture absorption, low flammability, performance at temperature extremes, and excellent weather resistance.


In a flame situation, products of Everflon™ PFA 430 resist ignition and do not promote flame spread. When ignited by flame from other sources, their contribution of heat is very small and added at a slow rate with very little smoke.



DATA LIST

Typical Property Data for Everflon™ PFA 430 Fluoroplastic Resin

Melt Flow Rate
ASTM D3307



35 ~ 45
g/10 min 5kg

Tensile Strength
ASTM D3307



> 25
Mpa

Elongation
ASTM D3307



> 350
%

Melting Point
ASTM D4591



310
°C

General Property Data for Everflon™ PFA 430 Fluoroplastic Resin

Property	Test Method		Unit	Typical Value
GENERAL				
Specific Gravity	—	ASTM D792	—	2.15
Critical Shear Rate, 372 °C (702 °F)	—	—	1/s	250
MECHANICAL				
Flexural Modulus	ISO 178	ASTM D790	MPa (psi)	
23 °C (73 °F)				625 (90,000)
250 °C (482 °F)				69 (10,000)
MIT Folding Endurance (0.20 mm, 8 mil film)	—	ASTM D2176	Cycles	4,000
Hardness Durometer	ISO 868	ASTM D2240	—	D55
ELECTRICAL				
Dielectric Strength, Short Time, 0.25 mm (0.010 in)	IEC 243	ASTM D149	kV/mm (V/mil)	80 (2,000)
Dielectric Constant, 1 MHz (10 ⁶ Hz)	IEC 250	ASTM D150	—	2.03
Dissipation Factor, 1 MHz (10 ⁶ Hz)	IEC 250	ASTM D150	—	<0.0002
Volume Resistivity	ISO 1325	ASTM D257	ohm-cm	10 ¹⁸
OTHER				
Water Absorption, 24 hr	—	ASTM D570	%	<0.03
Weather and Chemical Resistance	—	—	—	Outstanding
Limiting Oxygen Index	ISO 4589	ASTM D2863	%	>95
Continuous Service Temperature	—	—	°C (°F)	260 (500)
Flammability Classification	—	UL 94	—	V-0

Note: For more information of PFA properties, please visit www.everflon.com or PFA TechBook. These results are based on laboratory tests, under controlled conditions, and do not reflect performance under actual fire conditions.

TYPICAL APPLICATIONS

Applications for Everflon™ PFA 430 include high performance thinwall wire coatings; intricate injection molded parts for production of chemicals and electronic parts; and fluid handling systems for high performance chemical filters. With a typical melt flow rate (MFR) of 40, Everflon™ PFA 430 resin is ideally suited for applications requiring a high processing speed and very low viscosity.

PROCESSING GUIDE

Everflon™ PFA 430 can be processed by conventional melt extrusion, and by injection, compression, and transfer molding processes. High melt strength and heat stability permit the use of relatively large die openings and high temperature draw-down techniques that increase production rates. Reciprocating screw injection molding machines are preferred.

Corrosion-resistant metals should be used in contact with molten fluoroplastic resin. Extruder barrel should be long, relative to diameter, to provide residence time for heating the resin to approximately 390 °C (730 °F)

HANDING & PACKAGE

The properties of Everflon™ PFA resin are not affected by storage time. Ambient storage conditions should be designed to avoid airborne contamination and water condensation on the resin when it is removed from containers.

Everflon™ PFA is supplied as pellets and is available in 25-kg multilayer bags with an integral polyethylene liner.

PRECAUTION

Equipment used to process at melt temperatures should be provided with local exhaust ventilation (LEV) to completely remove all fumes and vapors from the processing area. In addition, care should be exercised to avoid the contamination of cigarettes and other forms of smoking tobacco when using fluoroplastic resins. Before processing any fluoroplastics, read the Material Safety Data Sheet.



ABOUT EVERFLON+



Reap the benefits of excellent pigment dispersion in your final polymer mix with Everflon+™ masterbatch formulations for PFA polymers. Pigment concentration and viscosity can be tailored to your specific application, and formulations are suitable for end-products with wall thicknesses that are as thin as 25 microns.

Color Concentrate

Conductive PFA Resins are manufactured as ready-to-use products and used in self-regulating or constant wattage heater cables, static dissipative fuel lines, and other applications where conductivity or static dissipation is required.

Everflon+ PFA Conductive compounds can also be customized for unique application requirements. Customization of products includes melt flow rate and physical properties of final compound as well as conductivity needed for the application.


Consistency and processability are the key factors in developing these compounds. In addition, Everflon+ PFA Conductive compounds show stable conductivity over a range of shear rates. **Conductive/anti-static**



Reinforced Compounds

PFA Reinforced compounds incorporate glass fibers, carbon fibers or mineral fillers for enhanced dimensional stability, toughness, abrasion resistance, shrinkage resistance and thermal conductivity characteristics.

More information could visit www.everflon.com or Everflon+Reinforced Fluoropolymers Book

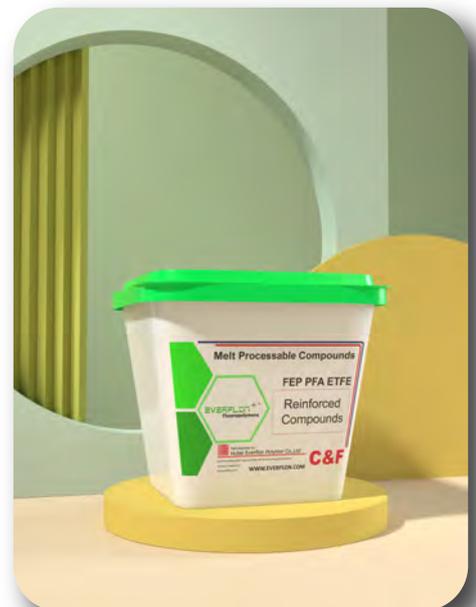

ABOUT C&F AND EVERFLON FLUOROPOLYMERS

Everflon™ is brand of C&F Group dealing in fluoropolymers materials including PTFE.FEP.PFA.ETFE and PVDF. On the basis of Everflon, C&F also developing the fluoropolymer applications including tubing,coating and films.

More information could visit www.everflon.com or Everflon™ Fluoropolymers Introduction and C&F Chemicals Book



*For more information, visit www.everflon.com
For sales and technical support contact, please contact info@everflon.com*

Everflon Fluoropolymer co.,ltd

Fuqiao Industrial Park,C&F Ave,Chaidian,Wuhan, China. 43100

Tel:+86-185-7168-9228

